

• • • • • RC200

REMOTE CONTROLLED SPEAKERPHONE

The Ameriphone RC200, by Clarity®, is designed to provide independent communication for persons with any degree of mobility and/or dexterity loss. It is ideal for use in homes and offices.



- **Hands-free conversations up to 15 feet away**
- **Voice activated answering**
- **High-fidelity speaker**
- **Wireless remote**
- **"One touch" operator access**

Clarity, a Division of Plantronics, Inc.

4289 Bonny Oaks Drive • Chattanooga, TN 37406 • USA

Toll Free: 1-800-426-3738

Fax: 1-800-325-8871

E-Mail: claritycs@plantronics.com

www.clarityproducts.com

CLARITY® 
Amplifying Your Life™

CLARITY Ameriphone RC200

Features:

- Quick access to all phone company services
- Automatic scanning and dialing of stored numbers
- 20 programmable memory-dial settings
- Adjustable scanning speed
- Voice mail / unanswered call indicator
- Remote "flash" function for call waiting or other phone company services
- Non-slip keypad buttons
- Battery back-up in case of power outage (batteries not included)
- Adjustable speakerphone volume control
- Built-in microphone
- Ringer volume control
- Mute, Flash/Pause, Program, Scan, Headset and Redial buttons

RC200 Remote Controlled Amplified Telephone

MSRP: \$399.00

Item: 68281.000

Outlets:

- 3.5 mm (microphone)
- 3.5 mm (air switch)


Power Requirements:

Requires an RJ11 modular phone jack and a standard 120-Volt electric outlet.

6 AA Nickel Cadmium Rechargeable batteries (for back-up)

©2005 Clarity, a Division of Plantronics, Inc. Ameriphone, Amplifying Your Life, Clarity, Clarity Power and the amplification device are trademarks or registered trademarks of Plantronics, Inc.

Does Clarity Power really make a difference?

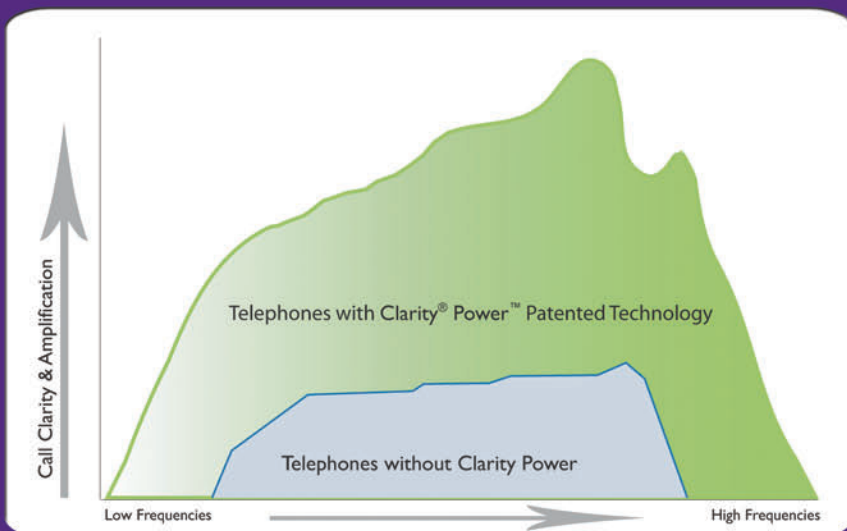

Clarity Power not only makes calls louder, but also easier to understand. The patented Clarity Power technology amplifies and shapes high frequencies to enhance communications for the millions of people who experience high frequency hearing loss, the most common type of hearing loss.